Measure for Pads with Grommets



The grommets are the 'holes' in the pads, and where the pads are hung from. This type of pad will require exact measurements of grommet hole placements across each panel (wall).








For the width of your pads


Measure (in inches) from the left edge to the right edge of each cab panel (wall).

For the length of your pads


- 1. Start measurements for the length of each pad 1.25 inches *above* the stud/hook. (The grommet holes sit 1.25 inches below the top of the pad).
- 2. Measure down to the floor, then subtract 4 inches from the bottom for code compliance.

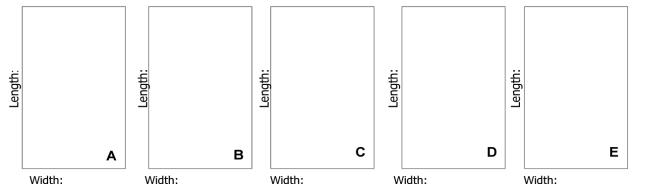

Measure Grommet Spacing

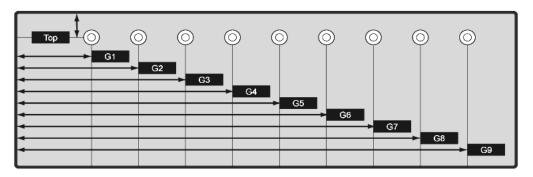


- 1. Enter the grommet spacing in the grid below for each panel (wall).
- For each panel, start from the very left, and measure to the middle of the 1st stud (or where hook/clamp will sit). Go back to the very left of the panel and measure to the middle of the 2nd stud. Continue until all the studs are measured.

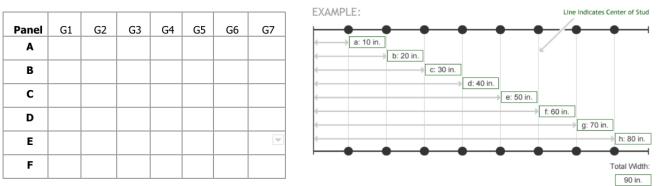

Measure for Pads with Studstrip



The studstrip has slots like button holes every 1" so that wherever the stud or hook is, a slot will fit. No additional measures are needed. These pads are more durable versus the grommet pads, as the strip going across the top is made of a parachute-like, corded material.

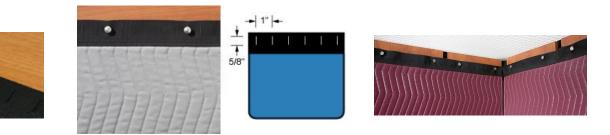


For the width of your pads

Measure (in inches) from the left edge to the right edge of each panel (wall).

For the length of your pads

- 1. Measure (in inches) from the top of the panel (wall) or ceiling to the floor.
- 2. Measure down to the floor, then subtract 4 inches from the bottom for code compliance.
- 3. For hooks: also subtract the height of the hook for the total length needed for each wall.

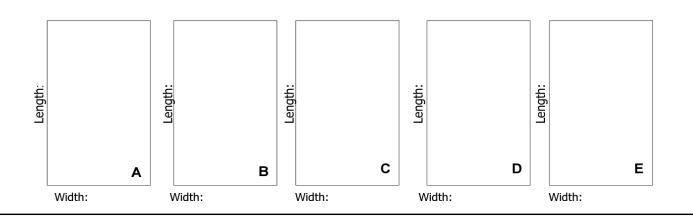

Measure for Pads with Clamps (no grommets, no studstrip)



The pads to use with clamps are pictured ('plain' pads, no grommet holes, no studstrip). Once you've decided on which clamp you need, follow the directions for measuring below length of the clamp will also be subtracted from the length of the pad).






(Choose one:)

_Short Ceiling Clamp

Hang elevator pads from drop ceilings



____Eye Clamp Hang elevators pads from pre-installed studs Wall Panel Clamp


Hang elevators pads from raised wall panels

For the width of your pads

Measure (in inches) from the left edge to the right edge of each panel (wall).

For the length of your pads

- 1. Measure (in inches) from the top of the panel (wall) or ceiling to the floor.
- 2. Measure down to the floor, then subtract 4 inches from the bottom for code compliance.
- 3. Also **subtract the height of the clamp** for the total length needed.

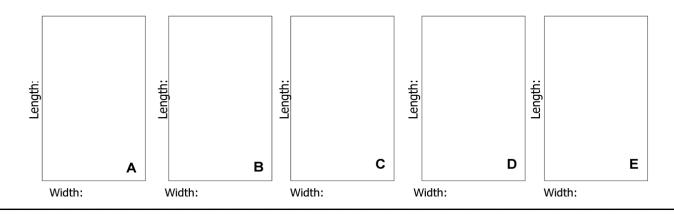

Measuring Cutouts




Cutouts are for where there's a button panel, handrails or other areas of the wall to leave exposed. Most of the wall will be protected with the pad, except for the area(s) of the `cutout'.








Follow the arrows as below for each panel (wall) with a cutout. Be sure to measure the cut-outs for each panel (wall) as they may differ in size.



From the same height used to measure for the pad:

Top: from stud/hook/clamp to the **top** edge of the cutout. **Bottom**: from stud/hook/clamp to the **bottom** edge of the cutout.

Left: left edge of the wall to the **left** side of the cutout. **Right**: left edge of the wall to the **right** side of the cutout.



For one cutout in a panel use this grid: (Be sure to put #s on the right panel line) For a second cutout in the same panel, use this second grid: (Be sure to put #s on the right panel line)

Panel	G1	G2	G3	G4	G5	G6	G7
A							
В							
С							
D							
E							~
F							

Panel	G1	G2	G3	G4	G5	G6	G7
A							
В							
С							
D							
E							~
F							